



Connect the Dots with Tosibox



Do it Easily.
Build and manage secure OT infrastructure in minutes



Do it Automatically.
Connect anything anywhere all automated



Do it Cybersecurely.
You own the data and it's always encrypted.

TOSIBOX® 670

LTE enabled Plug & Go™ connectivity device

TOSIBOX® 670 is a high-performance industrial connectivity device engineered for demanding applications in harsh environments. Its LTE and fixed Ethernet connectivity interfaces ensures uninterrupted operation, while its robust architecture delivers the speed and reliability required for mission-critical industrial systems.

The versatile connectivity options integrate seamlessly with Tosibox's state-of-the-art cybersecurity technology, enabling secure and flexible deployment scenarios. Protected by a durable aluminum alloy enclosure, its compact form factor allows for versatile mounting options in industrial settings.

The device supports advanced VLAN features. Its hybrid port capabilities enable simultaneous tagged and untagged VLAN traffic, making it ideal for complex industrial network architectures where different systems require varying levels of network isolation and access control.

Performance

- Massive VPN throughput for data consuming applications with end-to-end encryption between Tosibox devices, users and servers

Reliability and compatibility

- Dual-SIM slots for operator redundancy allows for even more reliable connectivity
- TosiOnline™ automatic reconnection of dropped connections
- Compatibility with all existing Tosibox products

TOSIBOX® 670 Technical Data

Product code TBL675

Certifications CE, FCC, IC, RCM, PTCRB, Verizon, SGS Safety Mark

Ports

- 1x RJ-45 WAN connection, 10/100/1000 Mb/s, auto-negotiation (MDI / MDI-X)
- 3x RJ-45 LAN connection, 10/100/1000 Mb/s, auto-negotiation (MDI / MDI-X)
- 1x USB 2.0, type A

Connections

- 4 pin industrial DC power socket
- 9-50V DC, reverse polarity protection, voltage surge/transient protection
- 2x SMA for LTE
- 1x GNSS
- DIN rail mounting slot in the back and on both sides
- Maximum power consumption 16W

Connection features

- 4-way WAN priority
- Proxy server support
- WAN access with static addressing or DHCP
- Network Time Protocol (NTP) server
- Automatic LAN network discovery
- LAN access with mixed static addressing and DHCP server
- Management web UI access via http/https
- Modbus server
- Static routes
- GNSS coordinates display on UI via GPS, GLONASS, BeiDou, Galileo and QZSS
- Built-in firewall, NAT
- Up to 50 concurrent VPN connections
- Aggregate VPN throughput up to 70 Mbps
- Single VPN throughput up to 25 Mbps
- Works in all Internet connections
- Works with dynamic, static and private IP addresses
- TosiOnline™ Automatic network recovery that recovers from most mobile operator and modem problems

4G Module for TBL675US

- Cellular module: Quectel EG06-A
- Region: North America and Mexico
- LTE Cat-6
- Up to 300 Mbps DL, 42 Mbps UL
- Dual SIM
- Frequency Bands
 - LTE FDD: B2, B4, B5, B7, B12, B13, B25, B26, B291, B30, B66
 - WCDMA: B2, B4, B5

4G Module for TBL675EU TBL675UK, TBL675AU

- Cellular module: Quectel EG06-E
- Region: EMEA/APAC/Brazil (excluding Japan)
- LTE Cat-6
- Up to 300 Mbps DL, 42 Mbps UL
- Dual SIM
- Frequency Bands
 - LTE FDD: B1, B2, B3, B4, B5, B7, B8, B12, B13, B18, B19, B20, B25, B26, B28
 - LTE TDD: B38, B39, B40, B41
 - WCDMA: B1, B2, B4, B5, B6, B8, B19

Digital I/O specifications

- 1x Digital input, 0-6 V detected as logic low, 8-30 V detected as logic high
- 1x Digital output, open collector output, max output 30 V, 300 mA
- Software configurable I/O state
- Requires separate I/O cable (TB600PAC1 or TB600PAC2)

VLAN

- 802.1Q and 802.1ad compliancy
- Each LAN port on a separate subnet
- Inter-VLAN routing
- Access and trunk ports
- Tagged/Untagged VLAN traffic
- Selective LAN access via Key

TOSIBOX® 670 Technical Data

Physical properties

- Size 115 mm x 44 mm x 95 mm / 4.52" x 1.74" x 3.74"
- Protection class IP30
- Weight 455 g / 1.00 lbs (net weight article)

Storage Temperature



- Node -40°C ... +75°C / -40°F ... +167°F
- Power supply -20°C ... +70°C / -4°F ... +158°F

Operating Temperature

- Node -40°C ... +75°C / -40°F ... +167°F
- Power supply -10°C ... +40°C / 14°F ... +104°F

Included accessories

- AC adapter - Input 100 – 240 V AC, frequency 50/60Hz 0,6A, Output 12.0 V, 1.5 A, max 18 W
- 2x LTE antennas (swivel, SMA male)
- 1x GNSS antenna (adhesive, SMA male, 3 m cable)
- Power plug with contact terminals
- DIN rail mount
- Ethernet cable (1.5 m)

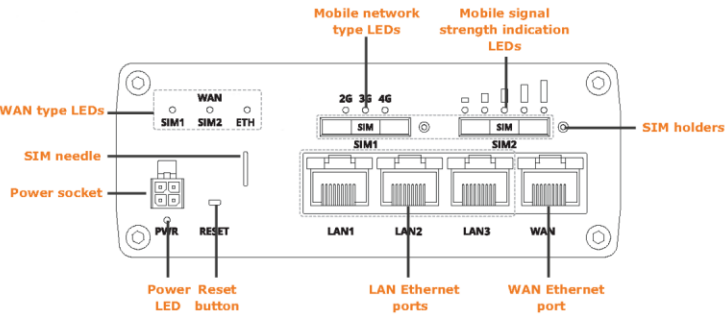

1. Power / +VDC
2. GND / 0 VDC
3. Digital Input
4. Digital Output

